



ELSEVIER

Contents lists available at ScienceDirect

Data in Brief

journal homepage: www.elsevier.com/locate/dib

Data Article

Evaluation and comparison the performance of titanium and zirconium(IV) tetrachloride in textile wastewater treatment



Hamidi Abdul Aziz^{a,b,*}, Muhamad Haziq Abd Razak^a,
 Muhammad Zamir Abdul Rahim^a,
 Wan Izatul Saadiah Wan Kamar^a, Salem S. Abu Amr^c,
 Sabir Hussain^d, John Van Leeuwen^d

^a School of Civil Engineering, Engineering Campus, Universiti Sains Malaysia, 14300 NibongTebal, Penang, Malaysia

^b Solid Waste Management Cluster, Science and Engineering Research Center, Engineering Campus, Universiti Sains Malaysia, 14300 Nibong Tebal, Penang, Malaysia

^c Malaysian Institute of Chemical and Bioengineering Technology, Universiti Kuala Lumpur (UniKL, MICET), Melaka, Malaysia

^d Natural & Built Environments Research Centre, School of Natural and Built Environments, University of South Australia, South Australia 5095, Australia

ARTICLE INFO

Article history:

Received 5 January 2018

Received in revised form

16 March 2018

Accepted 23 March 2018

Available online 28 March 2018

Keywords:

Textile wastewater

Coagulation

Titanium tetrachloride

Zirconium tetrachloride

ABSTRACT

Wastewater treatment is a key challenge in the textile industry. The current treatment methods for textile wastewater are insufficient or ineffective for complex dyes generated from the textile industry. This study evaluated the performances of two novel inorganic coagulants with high cationic charges, namely, titanium tetrachloride (TiCl₄) and zirconium tetrachloride (ZrCl₄). They were utilised to treat textile industry wastewater. Both coagulation processes were performed under the same experimental operational conditions. Turbidity, suspended solids (SS), colour, chemical oxygen demand (COD) and ammonia were measured to assess the efficiencies of the coagulants. Results indicated that ZrCl₄ and TiCl₄

* Corresponding author at: School of Civil Engineering, Engineering Campus, Universiti Sains Malaysia, 14300 Nibong Tebal, Penang, Malaysia. Fax: +60 45996906.

E-mail addresses: cehamidi@usm.my (H.A. Aziz), sabuamr@hotmail.com (S.S. Abu Amr), sabir202@yahoo.com (S. Hussain), John.VanLeeuwen@unisa.edu.au (J. Van Leeuwen).

<https://doi.org/10.1016/j.dib.2018.03.113>

2352-3409/© 2018 Published by Elsevier Inc. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

exhibited high potentials for textile wastewater treatment. $ZrCl_4$ presented high removal efficiency in COD and SS, whereas $TiCl_4$ showed excellent removal in ammonia.

© 2018 Published by Elsevier Inc. This is an open access article under the CC BY license

(<http://creativecommons.org/licenses/by/4.0/>).

Specifications Table

Subject area	Environmental Engineering
More specific subject area	Wastewater treatment
Type of data	Tables and figures
How data was acquired	All experiments were performed in 1000 mL glass beakers using jar test unit. $ZrCl_4$ and $TiCl_4$ were used as coagulants to treat textile wastewater samples. COD concentration, TSS, colour and ammonia were measured before and after each run, and the removal efficiencies were calculated.
Data format	Analysed
Experimental factor	Monitoring the removal efficiencies of turbidity, suspended solids, colour, COD, and ammonia from textile wastewater after each coagulation process.
Experimental features	Treatment of textile wastewater using $ZrCl_4$ and $TiCl_4$ as a coagulation process, and compare the performance of both coagulants based on the maximum removal efficiencies for each parameter.
Data source location	School of Civil Engineering, Engineering Campus, Universiti Sains Malaysia, 14300 NibongTebal, Penang, Malaysia
Data accessibility	Data were presented in the article.

Value of the data

- This article presents the data on the performances of two coagulants, $ZrCl_4$ and $TiCl_4$, in textile wastewater treatment
- The focus was on the comparison of the removal efficiencies of the parameters in textile wastewater, such as COD, TSS, colour and ammonia, under the effects of both coagulants.
- The dataset could also be used for reducing other parameters from other types of industrial wastewater, which is a challenging pollutant of natural water bodies.

1. Data

This study aimed to evaluate and compare the performances of titanium tetrachloride ($TiCl_4$) and zirconium tetrachloride ($ZrCl_4$) as coagulants in textile wastewater treatment. The performances of both coagulants were compared through the removal of such parameters as turbidity, suspended solids (SS), ammonia, chemical oxygen demand (COD) and colour. Table 1 presents the general characteristics of textile wastewater compared with Standard B of Environmental Quality (Sewage and Industrial Effluents) Regulation 2012 under the Environmental Quality Act 2012. Figs. 1–5 show the performances of $ZrCl_4$ and $TiCl_4$ in removing turbidity, SS, colour, ammonia and COD, respectively, under the effects of different coagulant dosages at natural wastewater pH. Figs. 5–10 present the effect of pH variation on the performances of the two coagulants ($ZrCl_4$ and $TiCl_4$) for turbidity, SS, colour, ammonia and COD removals. Table 2 summarise the operational conditions and performances of $ZrCl_4$ and $TiCl_4$ in parameter removal.

Table 1

Characteristics of textile wastewater compared with Standard B of Environmental Quality (Sewage and Industrial Effluents) Regulation 2012 under the Environmental Quality Act 2012.

Parameter	Textile wastewater		Standard B
	Untreated ¹	Treated ²	
pH	11.8	7.9	5.5 – 9.0
COD (mg/L)	998	552	250
Turbidity (NTU)	159	2.31	-
Colour (Pt.Co)	1020	860	-
Suspended Solid (mg/L)	540	40	100
Ammonia (mg/L)	65	8.2	-
BOD ₅ (mg/L)	80	24	40

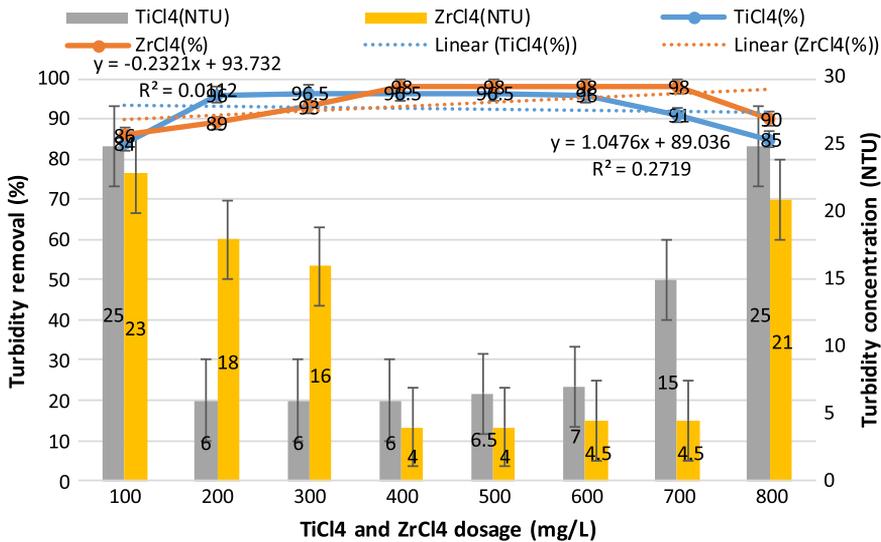


Fig. 1. Actual (NTU) and percentage turbidity removals using ZrCl4 and TiCl4 as coagulants.

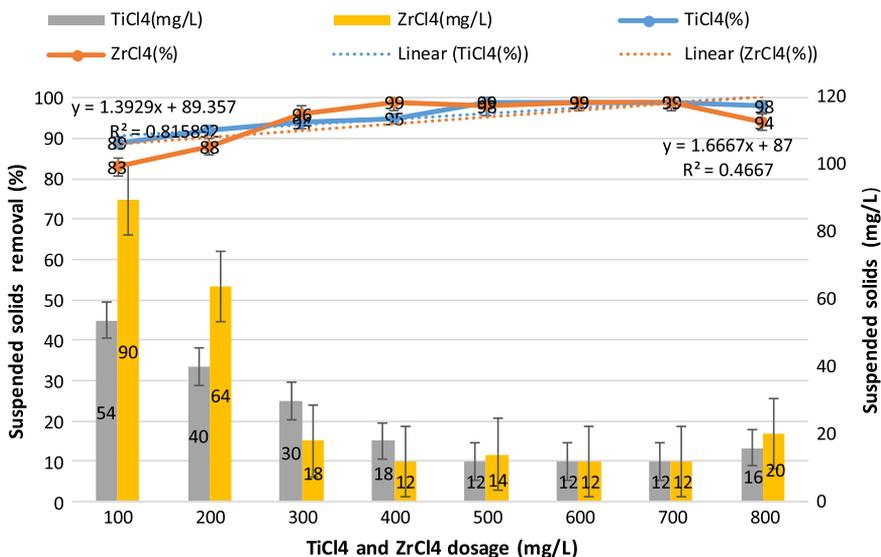


Fig. 2. Percentage SS removals by ZrCl4 and TiCl4 as coagulants and SS concentrations after treatments.

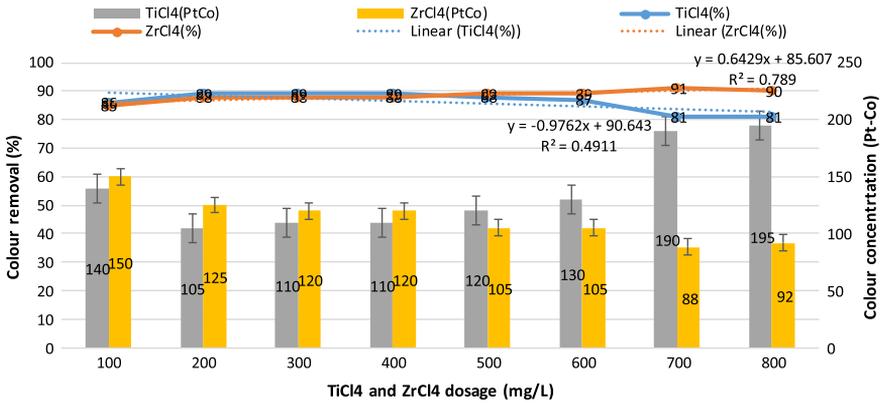


Fig. 3. Percentage removals of colour by ZrCl₄ and TiCl₄ coagulants and their residual (PtCo) after treatment.

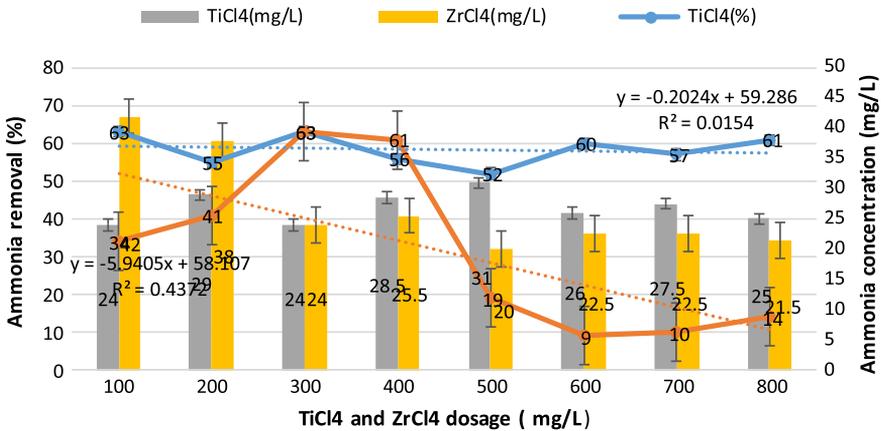


Fig. 4. Percentage removal of ammonia for ZrCl₄ and TiCl₄ as coagulant in textile wastewater treatment.

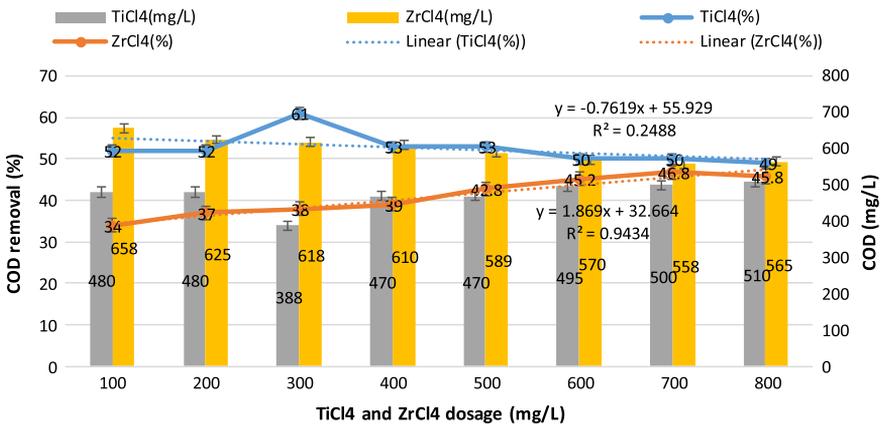


Fig. 5. Percentage removals of COD by ZrCl₄ and TiCl₄ as coagulants in textile wastewater.

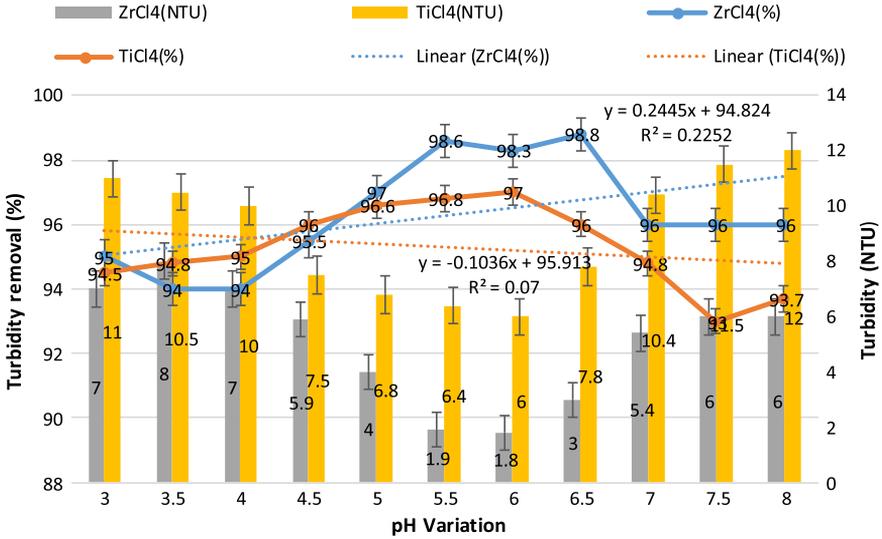


Fig. 6. Turbidity results of the ZrCl4 and TiCl4 treatments of textile wastewater over the 3–8 pH range.

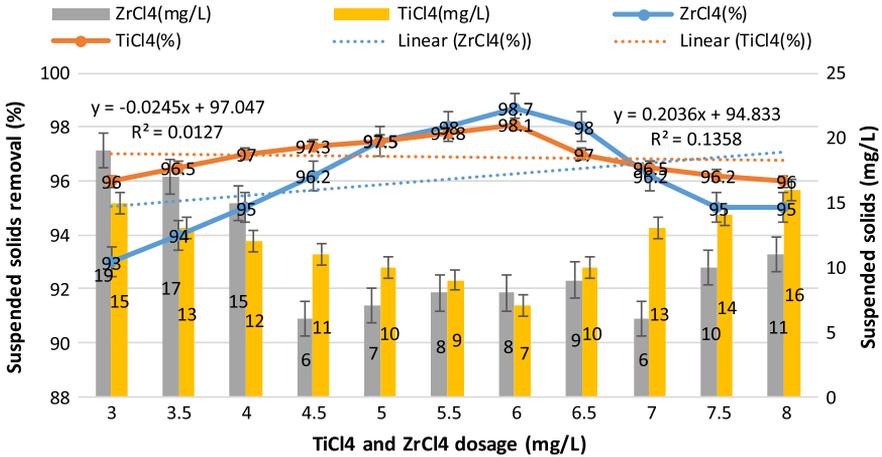


Fig. 7. Removal of SS by ZrCl4 and TiCl4 as coagulants in textile wastewater treatment.

2. Experimental design, materials and methods

2.1. Sampling

A textile wastewater sample was collected from a textile factory in Prai Industrial Estate, Penang, was immediately transferred to the laboratory and was stored at 4 °C, in accordance with the Standard Methods for the Examination of Water and Wastewater [1]. The parameters measured for assessing the coagulants were pH, colour, turbidity, SS, COD, biochemical oxygen demand, ammonia, alkalinity and hardness.

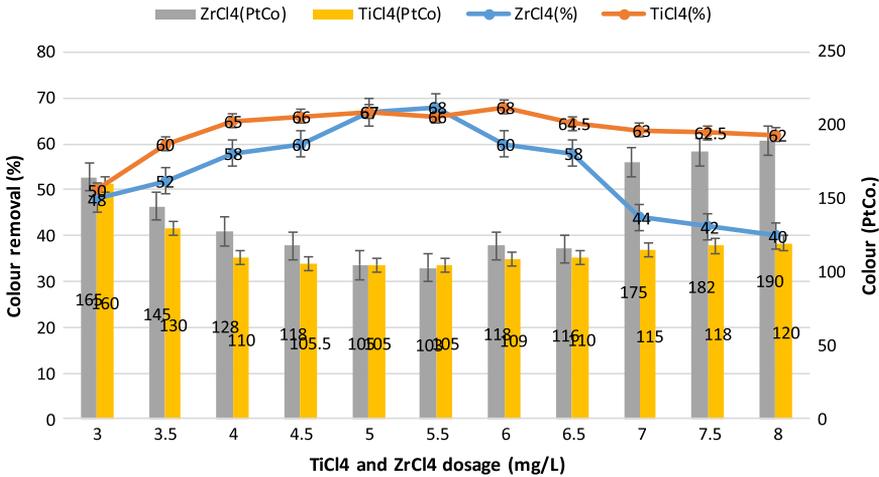


Fig. 8. Removal of colour by ZrCl₄ and TiCl₄ as coagulants in textile wastewater treatment.

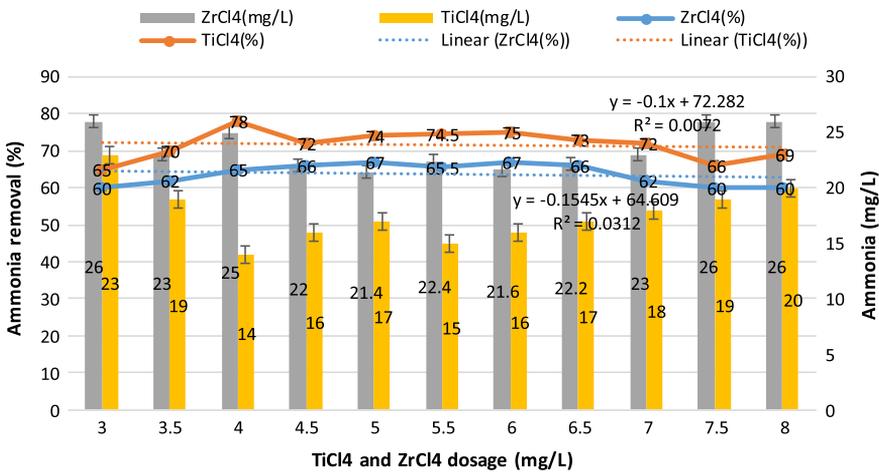


Fig. 9. Removal of ammonia by ZrCl₄ and TiCl₄ as coagulants in textile wastewater treatment.

2.2. Preparation of stock solution

Stock solutions of both coagulants were prepared before each experiment. The TiCl₄ stock solution was prepared by adding 1 mL of TiCl₄ to 0.2 M hydrochloric acid. A 5000 mg/L stock solution of ZrCl₄ was prepared by dissolving 5 g of ZrCl₄ in 1000 mL of distilled water. These stock solutions were stored for approximately 14 h at room temperature to dissolve the metal salts [2].

2.3. Coagulation-flocculation

Jar testing was conducted under standardised conditions on wastewater to evaluate coagulant dosages and conditions required to achieve the optimum treatment process. A conventional jar test apparatus was used in experiments to evaluate the performances of ZrCl₄ and TiCl₄ in treating textile wastewater. An automated jar test apparatus, which consisted of six 1000 mL beakers and six-spindle steel paddles, was used. The jar testing was performed after leaving the textile samples at ambient

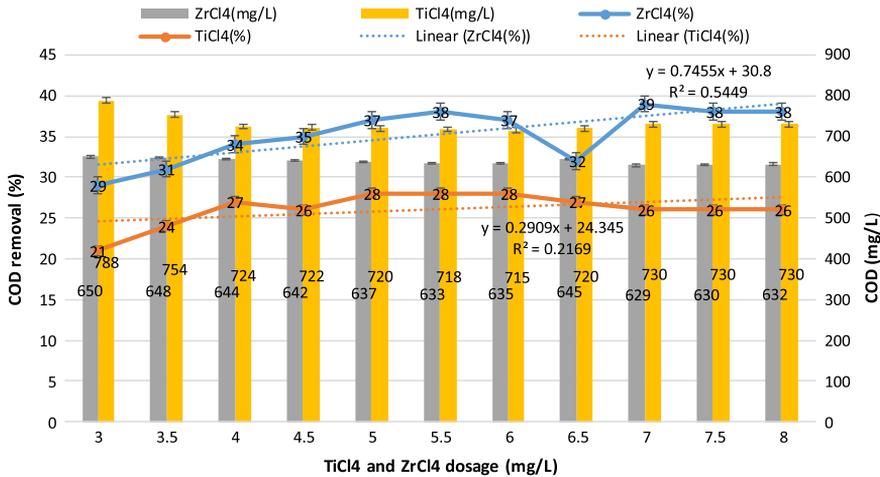


Fig. 10. COD removal by ZrCl₄ and TiCl₄ as coagulants in textile wastewater treatment.

Table 2

Summary of the comparison of the performances of ZrCl₄ and TiCl₄ as coagulants.

Item	ZrCl ₄	TiCl ₄
Operating condition		
pH	6	6
Coagulant dose(mg/L)	500	300
Rapid mixing time(min)	1	1
Rapid mixing speed(rpm)	250	250
Slow mixing time(min)	20	20
Slow mixing speed(rpm)	30	30
Settling time (min)	30	30
Removal rate (%):		
i)Turbidity	97	97
ii)Colour	60	68
iii)Suspended solids	99	98
iv)COD	36	28
v)Ammonia	67	28

temperature for 2 h. Stock solutions of ZrCl₄ and TiCl₄ coagulants were prepared before each experiment. The sample of textile wastewater was mixed with the coagulants before being poured into 500 mL beakers. After coagulant dosing into the wastewater samples, rapid mixing at 250 rpm for 2 min and slow mixing at 30 rpm for 20 min were performed. Flocs were allowed to settle for 30 min [2,3]. The treated wastewater samples were collected using a syringe from the supernatant surface for parameter measurements. In the jar test experiments, the TiCl₄ doses were varied from 100 mg/L to 800 mg/L at pH 3 to pH 8. The ZrCl₄ doses were varied from 300 mg/L to 800 mg/L at pH 4.5 to pH 7. The turbidity, colour, ammonia, COD and SS before and after treatment were measured. pH was measured on-site by using a portable digital pH/mV meter (WITEG, W-100, Germany) [4]. Colour measurements were reported as true colour (filtered using a 0.45 µm filter paper) at 455 nm using DR 2800 HACH spectrophotometer in accordance with the Standard Methods for the Examination of Water and Wastewater [1] (Method No. 2120 C). The result was reported in platinum–cobalt (PtCo) which was the unit of colour being produced by 1 mg platinum/L in the form of chloroplatinate ion. Turbidity was determined using a DR/2100 turbidimeter. SS was measured using a DR2800 spectrophotometer in accordance with the HACH standard: Photometric Method 8006. Ammonia was determined using a DR2800 spectrophotometer in accordance with the Nessler method [5], adopted

from the Standard Methods for the Examination of Water and Wastewater 4500-NH₃ B and C. COD was determined in accordance with Method 5220D (closed reflux, colourimetric method) [5]. The removal efficiencies of turbidity, SS, colour, ammonia and COD were obtained using the following equation:

$$\text{Removal(\%)} = \left[\frac{(C_i - C_f)}{C_i} \right] 100 \quad (1)$$

Where C_i and C_f are the initial and final concentrations of leachate, respectively.

Acknowledgment

This work is funded by the Ministry of Education Malaysia under FRGS grant scheme (Grant no. 203/PAWAM/6071280) for research associated with the Solid Waste Management Cluster, Engineering Campus, Universiti Sains Malaysia.

Transparency document. Supporting information

Supplementary data associated with this article can be found in the online version at <http://dx.doi.org/10.1016/j.dib.2018.03.113>.

References

- [1] Standard Methods for the Examination of Water and Wastewater, WPCF, AWWA, 21st ed., American Public Health Association (APHA), Washington, DC, 2005.
- [2] S. Hussain, J. Van Leeuwen, C.W.K. Chow, R. Aryal, S. Beecham, J. Duan, M. Drikas, Comparison of the coagulation performance of tetravalent titanium and zirconium salts with alum, *Chem. Eng. J.* 254 (2014) 635–646.
- [3] P. Jarvis, E. Sharp, M. Pidou, R. Molinder, S.A. Parsons, B. Jefferson, Comparison of coagulation performance and floc properties using a novel zirconium coagulant against traditional ferric and alum coagulants, *Water Res.* 46 (2012) 4179–4187.
- [4] S.S. Abu Amr, F.N.S. Zakaria, H.A. Aziz, Performance of combined ozone and zirconium tetrachloride in stabilized landfill leachate treatment, *J. Mater. Cycles Waste Manag.* 19 (2017) 1384–1390.
- [5] S.S. Abu Amr, H.A. Aziz, M.N. Adlan, M.J.K. Bashir, Pre-treatment of stabilized leachate using ozone/persulfate oxidation process, *Chem. Eng. J.* 221 (2013) 492–499.